

Features:

- **Qualcomm Atheros QCA9882**
- **Antenna: U.FL * 2 for 2T2R**
- **Data Rates: allows link speeds up to 867Mbps**
- **Support Linux driver**
- **802.11ac compliant & backward compatible with 802.11a/b/g/n**


WPEQ-256ACN

802.11ac/abgn Dual-Band 2T2R Mini PCIe Module




System	
Standards	IEEE 802.11ac/a/b/g/n (2T2R)
Chipset	Qualcomm Atheros QCA9882-BR4A
Data Rate	802.11b: 11Mbps / 802.11a/g: 54Mbps / 802.11n: 300Mbps / 802.11ac: 867Mbps
Operating Frequency	IEEE 802.11 ac/a/b/g/n ISM Band, 2.412GHz~2.484GHz, 5.150GHz~5.850GHz *Subject to local regulations
Interface	PCI Express
Form Factor	Mini PCIe
Antenna	2xUFL connector
Modulation	802.11b: DSSS (DBPSK, DQPSK, CCK) 802.11a/g: OFDM (BPSK, QPSK, 16-QAM, 64-QAM) 802.11n: OFDM (BPSK, QPSK, 16-QAM, 64-QAM) 802.11ac: OFDM (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM)
Power Consumption	TX:1050mA (Max)
Operating Voltage	DC 3.3V
Operating Temperature Range	-20°C~+60°C
Storage Temperature Range	-30°C~75°C
Humidity (Non-Condensing)	10%~85% (Operating) 5%~90% (Storing)
Dimension (in mm)	50.8mm * 29.85mm * 4.1mm
Weight (g)	≤ 8g
Driver Support	Linux
Security	WEP / WPA / WPA2,802.1X

Block Diagram

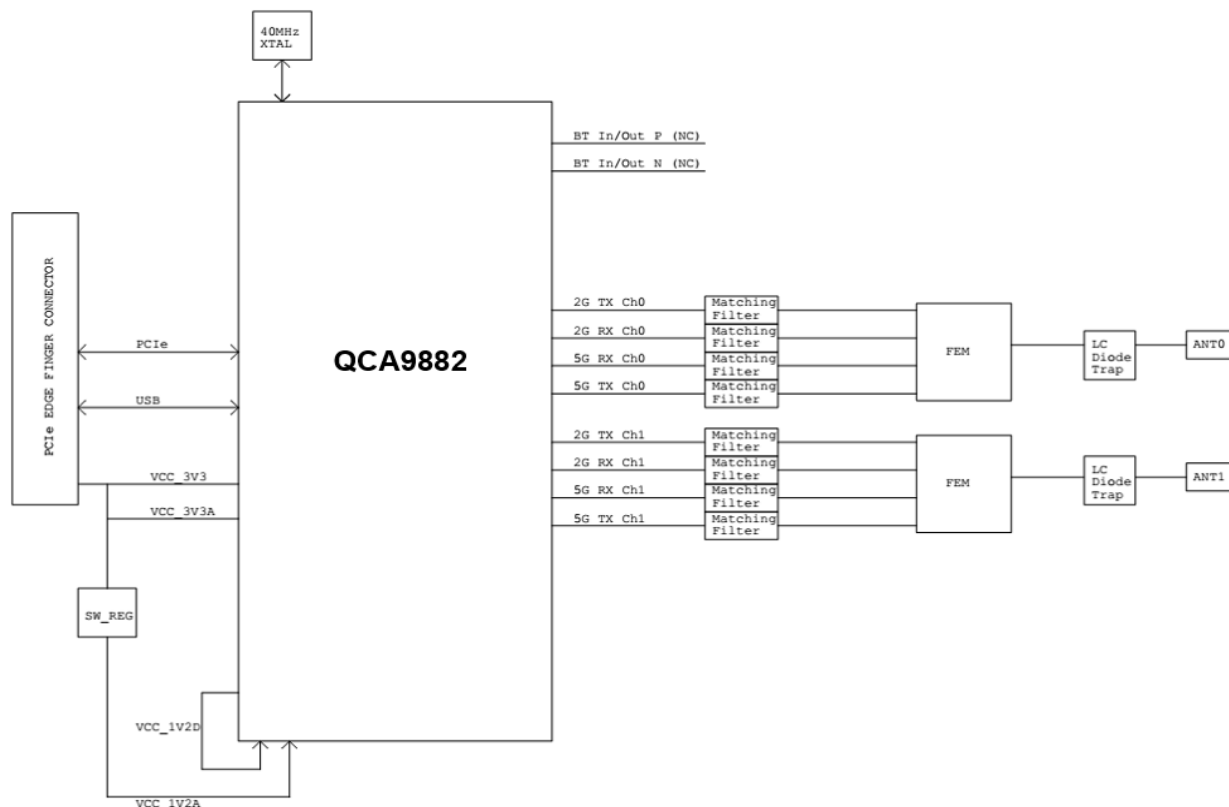

Mechanical Dimension (mm)

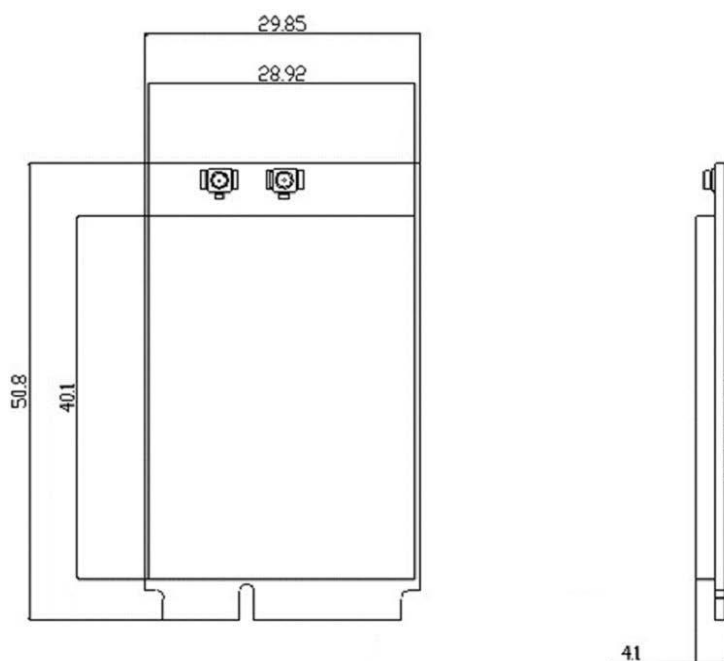

Pin Assignment

Pin#	Pin Name	Description	Pin#	Pin Name	Description
1	WAKE_L(NA)	Output and open Drain active Low signal. This signal is used to request that the system return from a sleep /suspended state to service a function initiated wake event.	2	+3.3V	+3.3V
3	No Connection	-	4	GND	GND
5	No Connection	-	6	No Connection	-
7	CLKREQ_L	Output for reference clock request signal	8	No Connection	-
9	GND	GND	10	No Connection	-
11	REFCLK-	Input signal for PCI Express differential reference clock (100 MHz)	12	No Connection	-
13	REFCLK+	Input signal for PCI Express differential reference clock (100 MHz)	14	No Connection	-
15	GND	GND	16	No Connection	-
17	No Connection	-	18	GND	GND
19	No Connection	-	20	W_DISABLE_L (OPT)	Input and active low signal. This signal is used by the system to disable radio operation on add-in cards that implement radio frequency applications. When implemented, this signal requires a pull-up resistor on the card
21	GND	GND	22	PERST_L	Input signal for functional reset to the card

Pin Assignment

Pin#	Pin Name	Description	Pin#	Pin Name	Description
23	PERn0	PCI Express x1 data interface: one differential receive pair	24	+3.3V	+3.3V
25	PERp0	PCI Express x1 data interface: one differential receive pair	26	GND	GND
27	GND	GND	28	No Connection	-
29	GND	GND	30	No Connection	-
31	PETn0	PCI Express x1 data interface: one differential transmit pair	32	No Connection	-
33	PETp0	PCI Express x1 data interface: one differential transmit pair	34	GND	GND
35	GND	GND	36	No Connection	-
37	GND	GND	38	No Connection	-
39	No Connection	-	40	GND	GND
41	No Connection	-	42	No Connection	-
43	GND	GND	44	LED_WLAN_L (OPT)	Output and open drain active low signal. This signal is used to allow the PCI Express Mini Card add-in card to provide status indicators via LED devices that will be provided by the system
45	No Connection	-	46	No Connection	-
47	No Connection	-	48	No Connection	-
49	No Connection	-	50	GND	GND
51	No Connection	-	52	+3.3V	+3.3V

NA: No active

OPT: Optional (Depends on S/W and H/W design of the module and customer platform main board, functionalities of end devices and drivers.)

Certification

■ FCC

■ IC

□ NCC

■ CE (RED EN 300 328 V2.1.1 / EN 301 893 V2.1.1)

■ MIC(Japan)

□ ASNZS

Ordering Information

Product Name	Part Number	Description
WPEQ-256ACN	R9701890025	802.11ac/b/g/n Mini PCIe Module(2T2R)

Optional Accessory

Product Name	Part Number	Description
AD-300N	R3410110219	Antenna Dual -Band 2.4GHz/5GHz 3dBi/5dBi Omnidirectional RP-SMA PLUG(BSMA)
AD-301N	R3410110220	Dipole Antenna, 2.4G/5G 4.4dbi/5dbi RP-SMA(M) connector
AD-302N	R3410110221	Dipole Antenna, 3dBi/2dBi 2.4G/5GHz, RP-SMA(M) connector
AD-303N	R3410110222	Dipole Antenna, 3dBi/3dBi 2.4G/5GHz, RP-SMA(M) connector
AD-305N	R3410110223	Dipole Antenna, 5dBi/5dBi 2.4G/5GHz, RP-SMA(M) connector
AD-103AG	R3410110203	Antenna Dual-Band 2.4GHz/5GHz, 2dBi Omnidirectional RP-SMA(M)
CBIRF-ME150	R3470300023	I-PEX/MHF1 to RP-SMA Female; L:150mm; Coaxial 1.37 Black
CBIRF-ME250	R3470300024	I-PEX/MHF1 to RP-SMA Female; L:250mm; Coaxial 1.37 Black